



- VA size models available from 25 to 175 VA.
- Split bobbin with top shroud design.
- Combination- Solder or Quick connect Terminal.
- Dual primary voltages.
- Class F insulation – 155 °C.
- CSA approved (LR63462) and UL recognized (E193917).
- Series/parallel secondary winding on all.
- Other primary and secondary voltages available.
- High insulation-4000 V between prim. and sec.

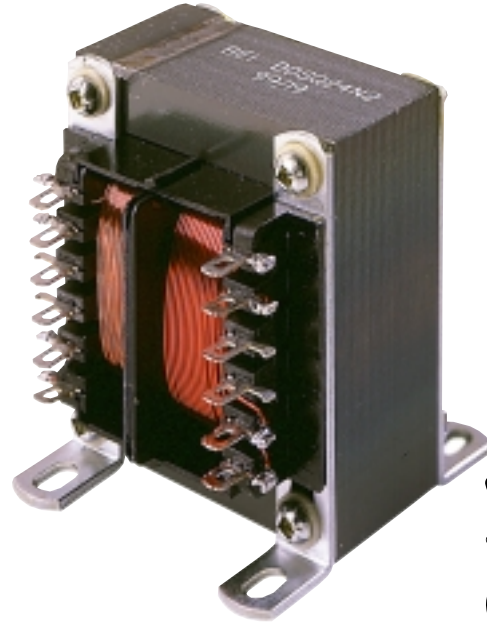


Primary Cat. No 115/230V 50/60Hz dual (8 term.)	Size VA	Secondary (RMS)	
		Series	Parallel
ADSQ10H2	25	10 V _{CR} @ 2.5 A	5 V @ 5.0 A
ADSQ10L2	43	10 V _{CR} @ 4.3 A	5 V @ 8.6 A
DDSQ10N2	80	10 V _{CR} @ 8.0 A	5 V @ 16.0 A
DDSQ10Q2	130	10 V _{CR} @ 13.0 A	5 V @ 26.0 A
DDSQ10R2	175	10 V _{CR} @ 17.5 A	5 V @ 35.0 A
ADSQ12H2	25	12.6 V _{CR} @ 2.0 A	6.3 V @ 4.0 A
ADSQ12L2	43	12.6 V _{CR} @ 3.4 A	6.3 V @ 6.8 A
DDSQ12N2	80	12.6 V _{CR} @ 6.3 A	6.3 V @ 12.6 A
DDSQ12Q2	130	12.6 V _{CR} @ 10.3 A	6.3 V @ 20.6 A
DDSQ12R2	175	12.6 V _{CR} @ 14.0 A	6.3 V @ 28.0 A
ADSQ16H2	25	16 V _{CR} @ 1.6 A	8 V @ 3.2 A
ADSQ16L2	43	16 V _{CR} @ 2.7 A	8 V @ 5.4 A
DDSQ16N2	80	16 V _{CR} @ 5.0 A	8 V @ 10.0 A
DDSQ16Q2	130	16 V _{CR} @ 8.1 A	8 V @ 16.2 A
DDSQ16R2	175	16 V _{CR} @ 11.0 A	8 V @ 22.0 A
ADSQ20H2	25	20 V _{CR} @ 1.25 A	10 V @ 2.5 A
ADSQ20L2	43	20 V _{CR} @ 2.2 A	10 V @ 4.4 A
DDSQ20N2	80	20 V _{CR} @ 4.0 A	10 V @ 8.0 A
DDSQ20Q2	130	20 V _{CR} @ 6.5 A	10 V @ 13.0 A
DDSQ20R2	175	20 V _{CR} @ 8.8 A	10 V @ 17.6 A
ADSQ24H2	25	24 V _{CR} @ 1.0 A	12 V @ 2.0 A
ADSQ24L2	43	24 V _{CR} @ 1.8 A	12 V @ 3.6 A
DDSQ24N2	80	24 V _{CR} @ 3.3 A	12 V @ 6.6 A
DDSQ24Q2	130	24 V _{CR} @ 5.4 A	12 V @ 10.8 A
DDSQ24R2	175	24 V _{CR} @ 7.3 A	12 V @ 14.6 A
ADSQ28H2	25	28 V _{CR} @ 0.9 A	14 V @ 1.86 A
ADSQ28L2	43	28 V _{CR} @ 1.5 A	14 V @ 3.0 A
DDSQ28N2	80	28 V _{CR} @ 2.8 A	14 V @ 5.6 A
DDSQ28Q2	130	28 V _{CR} @ 4.6 A	14 V @ 9.2 A
DDSQ28R2	175	28 V _{CR} @ 6.25 A	14 V @ 12.5 A
ADSQ36H2	25	36 V _{CR} @ 0.7 A	18 V @ 1.4 A
ADSQ36L2	43	36 V _{CR} @ 1.2 A	18 V @ 2.4 A
DDSQ36N2	80	36 V _{CR} @ 2.2 A	18 V @ 4.4 A
DDSQ36Q2	130	36 V _{CR} @ 3.6 A	18 V @ 7.2 A
DDSQ36R2	175	36 V _{CR} @ 4.8 A	18 V @ 9.6 A
ADSQ230H2	25	230 V _{CR} @ 0.11 A	115 V @ 0.22 A
ADSQ230L2	43	230 V _{CR} @ 0.19 A	115 V @ 0.38 A
DDSQ230N2	80	230 V _{CR} @ 0.35 A	115 V @ 0.70 A
DDSQ230Q2	130	230 V _{CR} @ 0.57 A	115 V @ 1.14 A
DDSQ230R2	175	230 V _{CR} @ 0.76 A	115 V @ 1.52 A

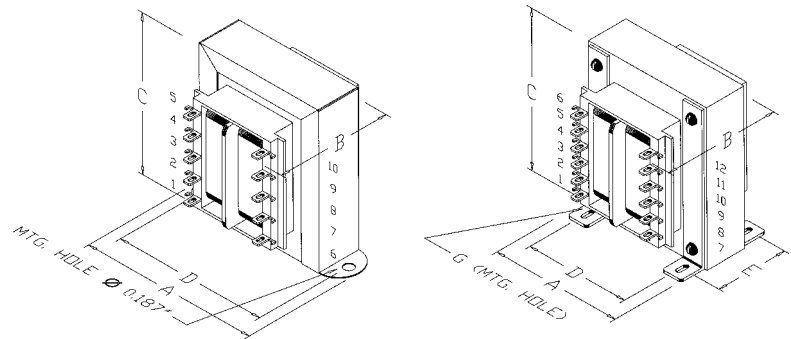

ADSQ DDSQ

Dual primary 115/230V 50/60Hz

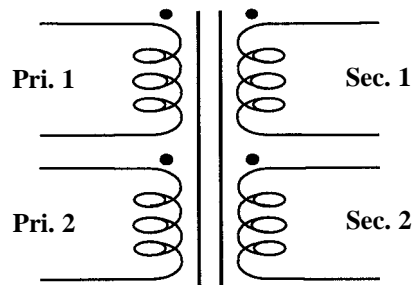

VA Size	Style	A	B	C	D	E	Mount. Hole G	Terminal Number		Terminal	lbs
								Pri.	Sec.		
25	ADSQ	2.81	2.25	2.35	2.38	-	.187	<u>1</u> -2, <u>4</u> -5	<u>6</u> -7, <u>9</u> -10	.187 x .020	1.3
43	ADSQ	3.13	2.25	2.73	2.81	-	.187	<u>1</u> -2, <u>4</u> -5	<u>6</u> -7, <u>9</u> -10	.187 x .020	1.6
80	DDSQ	2.52	2.63	3.04	2.00	2.25	.203 x .375	<u>1</u> -2, <u>5</u> -6	<u>7</u> -8, <u>11</u> -12	.187 x .020	2.8
130	DDSQ	2.83	3.13	3.42	2.25	2.50	.203 x .375	<u>1</u> -2, <u>5</u> -6	<u>7</u> -8, <u>11</u> -12	.250 x .031	4.1
175	DDSQ	3.15	3.25	3.79	2.50	2.50	.203 x .375	<u>1</u> -2, <u>5</u> -6	<u>7</u> -8, <u>11</u> -12	.250 x .031	5.5

All dimensions are in inches. Underline indicates polarity.